





- Features:
 - ☑ CEC Efficiency Regulations Compliance
 - ☑ RoHS Compliance
 - ☑ IEC320 C14 (3PIN)
 - ☑ Over Voltage Protective Installation
 - ☑ Short circuit Protective Installation
 - ☑ Protection Type: Auto-Recovery
 - ☑ Application: Medical Equipment

SPECIFICATION

Model Item	EM10601A	EM10601B	EM10601C	EM10601D	EM10601E	EM10601F
Output Voltage	13V~17V	18V~24V	12V~17V	18V~24V	12V~17V	18V~24V
Output Rating (Max.)	55W	55W	50W	50W	42W	42W
Output Current (Max.)	4.2A	3.0A	4.2A	2.8A	3.5A	2.3A
Input Voltage (Limit)	AC 90~264V					
Input Frequency	47~63Hz					
Line Regulation	1% Max.					
Load Regulation	+/- 5%					
Ripple & Noise	1.2% Max.					
Efficiency	85% Typical					
Over Voltage Protection	Yes					
Short circuit Protection	Yes					
Operating Temperature	0~40°C					
Storage Temperature	-20°C~85°C					
Class I or Class II	Class I					
Safety Approval	UL60601-1 , EN 60601-1 , IEC 60601-1					
Safety Standards	UL/CUL, TUV/GS, CB, FCC, CE					
MTBF	50,000 hours					
LED Indication	Yes					
Dimension	121L x 60W x 34.5H mm					
Approx. Weight	280 grams					
Output Plug	Optional					

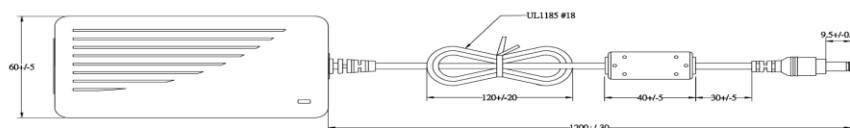

EDAC POWER ELEC.				APPROVED
MODEL	SUBBOARD	UNIT	mm	DESIGNED
COLOR	BLACK	SCALE		CHECK
CUS.		DATE	2006-10-12	DRAWING L.YU